



Product Overview



SPACE

Rack Based Facility NAS

SPACE is the true successor to SAN, designed to be used directly across the network with an abundance of sustained reliable performance and comprehensive CORE.4 workflow tools.

Ideal for Film, Post-Production and Facilities.


Technologies:

IDA² / Dynamic Bandwidth / Analytics Centre / CloakDR / Mosaic

Capacity: 64 - 160TB

Speed: Up to 2GB/s

Expandable: Up to 3PB

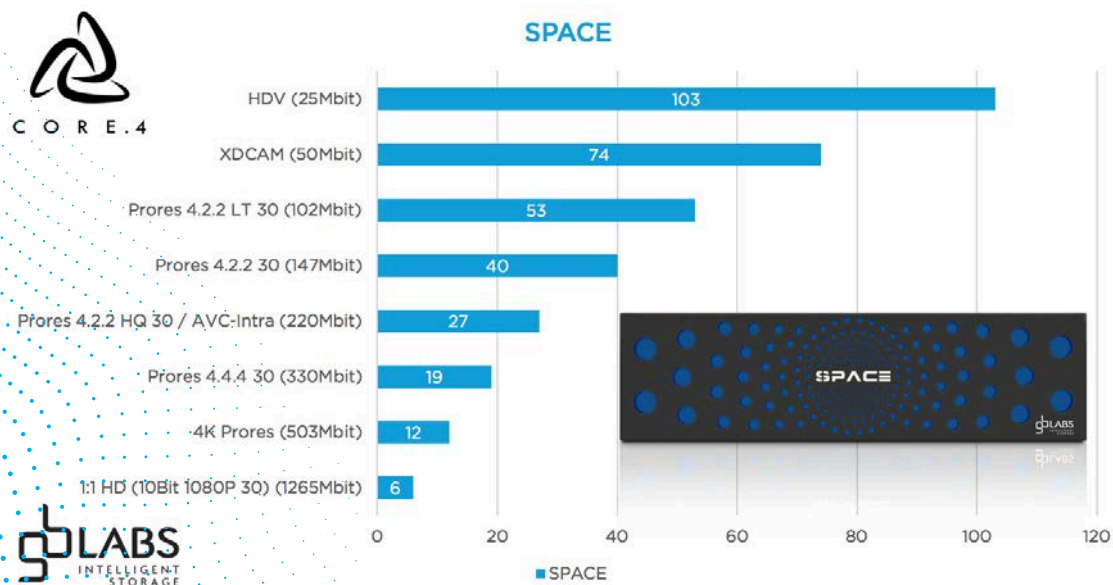

Technical Overview

Unit Specifications

Unit dimensions: 13.2cm x 43.7cm x 64.8cm (5.1" x 17.2" x 25.5")
Unit weight: 33kg (72.7lbs)
Input range: 100 - 240 VAC, 50-60Hz
PSU safety: EMC - USA-UL listed. Canada-CUL listed, Germany-TUV certified, EN60950/IEC 60950-Compliant, CB report, CCC certification
Power supply: Dual redundant 1000W removable PSUs
Power requirements standby: 33W
Power requirements full load: 350W
Operating temperature range: 10°C - 35°C
Non-operating range: -40°C - 70°C
Operating humidity range: 8 - 90% non-condensing
Non-operating humidity range: 5 - 95% non-condensing
Unit form factor: 3U rackmount (rack mounts included)

Bootable replacement OS is provided on Rescue Capsule USB drive for fast system recovery.

Configurable Capacities

SPACE 64TB, 96TB, 128TB and 160TB
SPACE EX 32TB, 64TB, 96TB, 128TB, 160TB (Up to 3PB)

Connectivity

On Motherboard

4 x USB 3.0 ports	2 x 10Gb Ethernet (RJ45) ports - Backwards compatible with 1Gb Ethernet (RJ45)
1 x VGA connector	1 x RJ45 dedicated IPMI LAN port
1 x COM port	

Other

2 x 10/40Gb Ethernet ports - QSFP to SFP+ adapters included
Option for additional 1Gb, 10Gb, 25Gb and 40Gb Ethernet ports (RJ45 or SFP+)

Key Features

CORE.4 OS	Automation
IDA ²	Active Directory
Dynamic Bandwidth Control	Workspace access control
HyperSpace compatible	Mosaic
RAID 6 Data Protection	File Manager
Replication	Analytics Centre
Snapshots	CloakDR